



ZEBRA

Z-Xtreme 2000T


FEATURES

- Thermal transfer, matte polyester label with a high-performance permanent acrylic adhesive
- Some smear/scratch resistance
- Good durability and chemical resistance
- Topcoating is suitable for fanfolding
- Available in white (66748RM), silver (66749RM), clear (66753RM)

MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White, silver, or matte coated polyester	2.4 mil
Adhesive	Permanent, acrylic-based	0.9 mil
Liner	50 lb. semi-bleached, kraft stock	3.1 mil
TOTAL ± 10%		6.4 mil

ADHESIVE STRENGTH

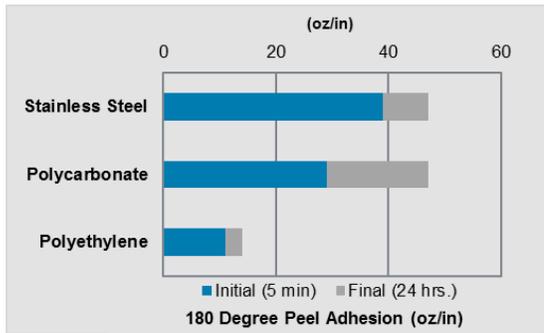

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
32° F (0° C)	-40° F to 302° F (-40° C to 150° C)	72° F (22° C) at 50% RH

Expected Exterior Life
3 years

CHEMICAL RESISTANCE

	Chemical	Suggested Ribbon			
		6100	3200	6200	5095
Weak	Blood	●	●	●	●
	Body Fluid	●	●	●	●
	Salt Water	●	●	●	●
	Water	●	●	●	●
	Window Cleaner	●	●	●	●
Moderate	Alcohol	●	●	●	●
	Ammonia	●	●	●	●
	Bleach	●	●	●	●
	IPA	●	●	●	●
Harsh	Gasoline	NR	NR	NR	NR
	Grease	NR	NR	NR	NR
	Oil	NR	NR	NR	NR
Extreme	Acetone	NR	NR	NR	NR
	IR Reflow	NR	NR	NR	NR
	MEK	NR	NR	NR	NR
	TCE	NR	NR	NR	NR
	Xylene	NR	NR	NR	NR

● Recommended ● Test in Your Application NR Not Recommended

SUGGESTED APPLICATIONS

- UL compliant product labeling



- Product identification



- Automotive labeling



All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.
NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com
©2018 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.





Z-Xtreme 2000T

UL/CSA ACCEPTANCES

Z-Xtreme 2000T Silver, White and Clear with 5555, 3200, 5586, and 5095 ribbons are UL-recognized for indoor use.

FACESTOCK TENSILE STRENGTH

- Machine direction: 18,000 psi
- Transverse direction: 22,000 psi

NOTE: For guidance only, not to be used for setting specifications

All products should be pre-tested to ensure it meets all intended requirements of specific end-use applications.

For more information, visit www.zebra.com/supplies

Product Performance and Suitability: The information contained in this document is to be used for guidance only and is not intended for use in setting specifications. All purchasers of Zebra products shall be solely responsible for independently determining if the product conforms to all requirements of their unique application.
NA and Corporate Headquarters | +1 800 423 0442 | inquiry4@zebra.com
©2018 ZIH Corp and/or its affiliates. All rights reserved. ZEBRA and the stylized Zebra head are trademarks of ZIH Corp, registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.

